


Key Features

- Wireless presentation for enhanced efficiency
- Single USB-C cable for 65W power delivery
- 24/7 video playback for continuous communication
- Remote device management with myViewBoard Manager
- ProAV compatibility with Crestron, Extron, and AMX



Product **Description**

With stunning 4K Ultra HD resolution, high brightness, and landscape and portrait modes, the CDE30 Series offers continuous and sustainable 24/7 display for both corporate and campus communication. Purpose-engineered for ease of use, the display is equipped with a Quad Core SoC to run multiple operations seamlessly, and its USB-C one-cable solution sorts for effortless connection with external devices. Designed for easy-to-operate continuous multimedia playback, the CDE30 Series offers cable-free screen casting and screen sharing through myViewBoard Display and vCast, which also supports Airplay and Chromecast. Remote management via the intuitive myViewBoard Manager makes changing content, broadcasting, and software updates a breeze. Available in six sizes ranging from 43" to 98", the CDE30 Series features HDMI input and output for seamless tiling of up to 9 screens, meeting the communication needs of any campus, corporate, or retail space.

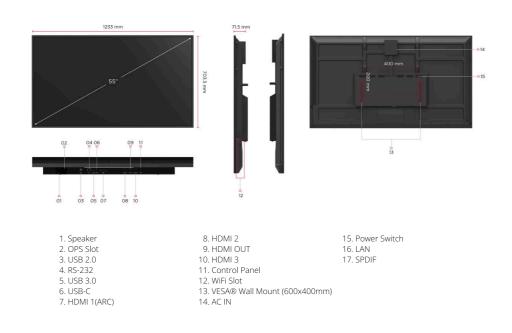

Visit Us

www.viewsonic.com

Net (lb / kg):

Gross (lb / kg):

DICDI AV

DISPLAY	
Panel Size:	55"
Type/ Tech:	TFT LCD Module. VA type, DLED backlight
Display Area (mm):	1209.6 (H) × 680.4 (V) (54.64" diagonal)
Native Resolution:	3840 x 2160
Aspect Ratio:	16:9
Colors:	1.07G (8bits + FRC-)
Brightness:	450 nits (typ.)
Contrast Ratio:	1200:1 (typ.), 5000:1 (DCR enabled)
Response Time:	6.5ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 hours
Surface Treatment:	Anti-Glaire, 3H hardness, Haze 25%
Bezel:	9.9/9.9/9.9/9.9 mm (L/R/T/B)
Orientation:	Landscape & Portrait
PLATFORM	
Processor:	Quad-core ARM Cortex A55
RAM:	4GB
Storage:	32GB
INPUT	
HDMI:	2.1x2 (3840x2160 @60Hz, HDMI 1 supports ARC)
RS-232:	x 1
WiFi Slot:	x 1
OUTPUT	
HDMI:	2.0 x1 (3840x2160 @60Hz)
SPDIF:	x 1
LAN	

x 1

2.0 x 1, 3.0 x 1

100M ethernet)

100-240 VAC +/- 10%

82 W(typ.) < 0.5W(off)

0 to 40°C

10%-90% RH

x1 ((DP1.2, PD 65W, USB2.0,

REGULATIONS cTUVus, FCC/ICES003, Energy star 8.0, EPEAT, Mexico NOM, Mexico Energy, EMC/CE, CB, EAC, UkrSEPRO, RCM, LBL, Flicker free, Green BOM, RoHS, ErP, REACH, SCIP, WEEE, Annex I, Annex II, TPCH, Packing waste, CA65

29.54 lbs/13.4 kg 42.99 lbs/19.5 kg

PACKAGE CONTENTS

- 1. Remote Control with batteries
- 2. Quick Start Guide 3. Power Cables 4. HDMI cable 5. USB-C cable

- 6. Wall Mount Screw x 4
- 7. RS232 adapter
- 8. Compliance statement

OPERATING HOURS

7/24

Humidity:

RJ45:

Type C:

SPEAKERS 10W x2

EMBEDDED OS Android 11 **POWER** Voltage:

Consumption:

Temperature (° C):

USB Type A:

DIMENSIONS (WXHXD)

OPERATING CONDITIONS

48.54 x 27.70 x 2.81in/ 1233 x 703.5 x 71.5mm Physical (inch / mm):

52.44 x 32.24 x 6.14 in./1332 x Packaging (inch / mm):

819 x 156 mm