

DIRECT VIEW LED
LDS138-151


Key Features


- Pre-assembled kit, ready for immediate use—no installation required
- Foldable screen that fits easily into large passenger elevators for convenient transport
- Shockproof, dustproof, and moisture-resistant with GOB surface treatment
- Built-in stand with an integrated control box and motorized height adjustment
- Seamless large display designed to captivate audiences in any space



Product Description

The ViewSonic® LDS138-151 is a foldable 138" All-in-One LED display that provides instant use, easy transport, and convenient operation. With a pre-assembled design and built-in motorized height adjustment, this display can be set up in just 10 minutes without wall mounting, making it ideal for large venues or spaces where renovations are not feasible. The foldable screen design significantly reduces packaging size, cutting shipping costs, improving delivery efficiency, and enabling easy transport between locations. The integrated system control box on the floor stand ensures tidy cable management and a premium, frameless visual experience. Featuring Glue-on-Board (GOB) surface treatment technology, the IP54-rated LED modules offer enhanced protection against impacts, dust, and moisture during installation and use. With its seamless large screen and dual 30W speakers, the LDS138-151 is ready to captivate audiences in environments such as high-end boardrooms, receptions, galleries, auditoriums, and other large venues.

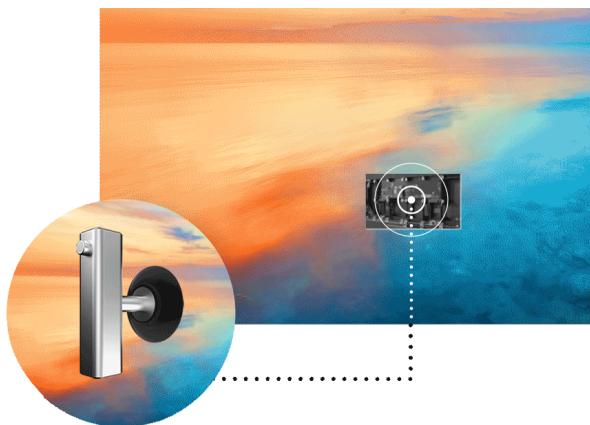

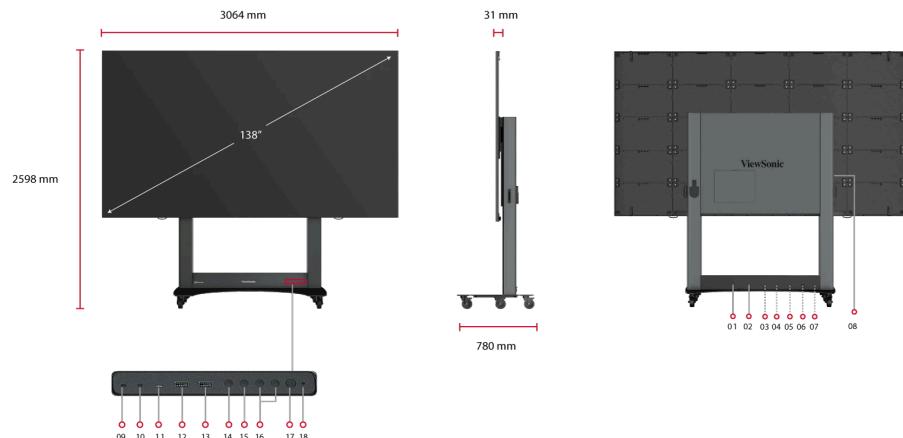

- 1. HDMI Out
- 2. Audio Out
- 3. HDMI In x4
- 4. S/PDIF Out
- 5. USB 2.0 (5V/2A)
- 6. LAN
- 7. IR Extension

- 8. Control Panel: Height Adjust
- 9. Light Sensor
- 10. IR Receiver
- 11. USB-C (5V/1.0A)
- 12. USB 3.0 (5V/0.9A)
- 13. USB 2.0 (5V/0.5A)
- 14. Menu Control: Setting

- 15. Menu Control: Enter
- 16. Menu Control: Brightness Level
- 17. Power Button
- 18. Indicator Light

Visit Us

www.viewsonic.com

SPECIFICATION		OTHERS	
Screen Size:	138"	Power Supply Voltage:	100-240V ~ 50/60Hz (vary by country)
Display Area (mm):	3050 (H) x 1715(V)		581W (typ), 1745W (max) < 0.5W (Hibernate) Inrush Current: 220V: 84A / 110V: 58A
Native Resolution:	1920x1080	Power Consumption (W/unit):	
Panel Technology:	Direct view LED	Operating Temperature:	0~40°C
LED Package Type:	SMD 3 in 1 (GOB)	Total LED Module Quantity:	200
Bonding Wire:	Copper	Ingress Protection Rating:	IP54(Front)
Pixel Pitch (mm):	1.588	Impact Protection Rating:	IK06(Front)
Brightness (max.):	600 nits (100 levels adjustable)	Net Weight:	511.16 lbs (250 kg)
Contrast Ratio (typ.):	6500:1	Gross Weight:	919.33 lbs (417 kg)
Color Temperature:	3000K -10000K	Product Dimensions (WxHxD):	1850.81x1948.4x780mm(min.) 3064x2598x780 mm(max.)
Orientation:	Landscape	Packing Dimensions (WxHxD):	81.5x78.58x33.35 inches (2070x1996x847 mm)
Viewing Angles (typ.):	H = 170, V = 170		
LED Lifetime (typ.):	100,000 Hours		
Local Storage:	Total 32GB (26GB available storage)		
Embedded OS:	Android 9.0		
Resolution Support:	VGA(640 x 480) to 4K(3840 x 2160@60hz)		
HDTV Compatibility:	480p, 576p, 720p, 1080p, 2160p		
Horizontal Frequency:	31K-94kHz		
Vertical Scan Rate:	56-85Hz		
INPUT		STANDARD ACCESSORIES	
HDMI:	4 (HDMI 2.0/HDCP 2.2) (internal x3, external x1)	Power Cord:	1
USB Type A:	3 (USB3.0 x1, USB2.0 x2)	LAN Cable (Cat 5E):	1
RJ45 Input:	3 (internet x2, control x1)	IR Extender Cable:	1
IR in (3.5mm):	1	Remote Control:	1
Wi-Fi Input:	2.4G/5G Hz	QSG:	1
USB Type C:	1 (data only)	Spare Parts:	LED module x14 3 in 1 hub board x3
		Maintenance Tool:	LD-MK-006 x1
OUTPUT		OPTIONAL ACCESSORIES	
HDMI out:	1 (HDMI 1.4/HDCP 1.4) (internal x1)	Maintenance Tool:	LD-MK-006
Speaker:	30Wx2		
Audio out (3.5mm):	2		
S/PDIF:	1		
USB Type A (Power):	Shared with USB A input (USB 3.0 5V/0.9A x1, USB 2.0 5V/0.5A x1, USB 2.0 5V/2A x1)		
USB Type C (Power):	Shared with USB Type C input (5V/1A x1)		
CONTROL			
RJ45 (LAN control):	1(shared with internet)		
USB Type A (Services):	1(shared with USB A input)		
RS232 (DB 9-pin female):	1		
IR Receiver:	1		